
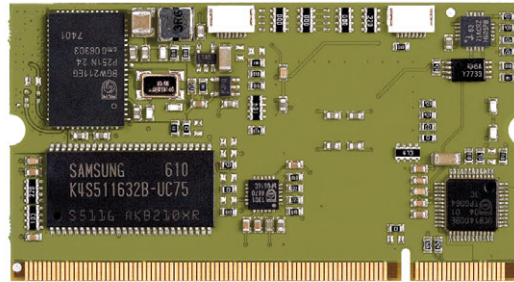


# Trizeps IV-WL

## Marvell® XScale PXA270M SODIMM-200 CPU module

Keith & Koep

- Compact and full scaleable
- Trizeps SODIMM-200 compatible
- Audio codec and ethernet transceiver
- Onboard WLAN Module
- Evaluation-kits available

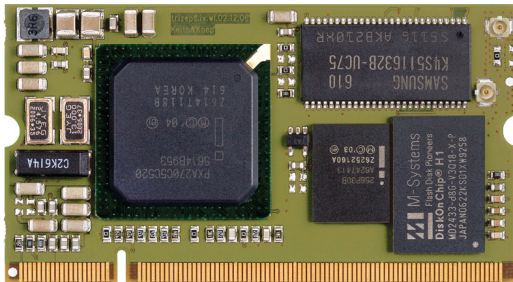

### Variable Features

Processor	Marvell® XScale PXA270M Options: 312, 416, 520 or 624 MHz
RAM Memory	Low-Power SDRAM Options: 64 MB or 128 MB
Flash Storage	32 Bit wide Strata Flash Options: Strata-Flash-Type: 32 MB or 64 MB

### Onboard Features

Display Interfaces	LCD 16 Bit RGB
Interfaces	USB1.1 FS Host and Slave, PCMCIA / Compact Flash Card, 4 x UARTs, 1 x 4 Bit wide SDIO, Address-Data-Bus, I2C, SPI, GPIOs, PWMs
Ethernet	Onboard 10/100 MBit Ethernet PHY
Camera Interfaces	8bit parallel camera
Audio Codec	AC'97 Audio Codec with 4/5 wires res. Touch and 4 x 12 Bit ADC (2 x comparator inputs for battery monitoring)
Power	High-Eff. Switch-mode core voltage regulator with single +3V3 supply
SODIMM200 Card Edge Connector	Pin compatible to Trizeps III, IV, IV-M, IV-WL Modules
Wireless Communication	Onboard WLAN module, IEEE 802.11 b/g

### General Details

Operating Systems	Microsoft Windows Embedded CE 5.0, 6.0 R3, Compact 7
Voltage Supply	+3V3 DC
Operating Temperature	0 °C ... 70 °C commercial / -20 °C ... +85 °C industrial
Board Dimensions	67.6 x 36.7 x 6.0 mm (incl. µSD Socket)
Environmental Standard	RoHS, REACH, WEEE
Availability	EOL (End Of Life) for Trizeps CPU modules with Strata-Flash. Please contact us for more information.



www.keith-koep.com

Keith & Koep GmbH  
Uellendahler Str. 199  
42109 Wuppertal

Tel +49 (202) 25253 0  
Fax +49 (202) 25253 33